

## Prefabricated Module 15 sqm (Allows coupling and Stecking of more units)

### LOAD BEARING FRAME:

Load bearing frame made of galvanized steel, thickness 20/10 / 30/10;

### FLOORING SYSTEM:

Flooring system made of wooden panels, thickness 18 mm, on which a linoleum sheet is glued;

### SIDeward "SANDWICH" PANELS:

Sandwich insulated panels, thickness 40/60 mm;

### DOOR/WINDOWS FRAME:

- N° 2 External Blind door;
- N° 6 Internal Blind door;
- N° 6 Vasistas Window;


### ELECTRICAL SYSTEM:

- N° 1 Patch box;
- N° 2 Ceiling light;
- N° 2 Switch;
- N° 2 Socket 10/16A;

### PLUMBING:

- N° ? Shower base, with mixer tap and shower dispenser; **(Ref. A)**;
- N° ? W.C. with wall waste pipe; **(Ref. A)**
- N° ? Indian toilet; **(Ref.A)**
- N° 2 Sinks in ABS;
- N° 2 Boiler 150lt.

**(Ref. A:** sanitary cabins customizable multifunction)

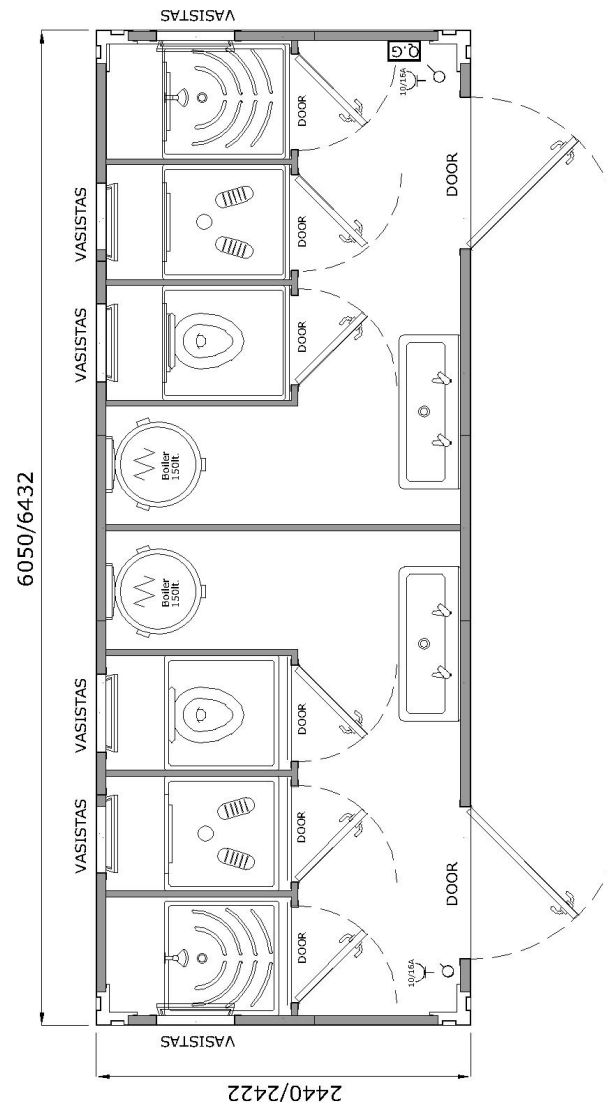

H int.: 2,40/2,70 m.  
H est.: 2,70/2,99 m.